


2M-1223M

RECHARGEABLE CAMCORDER SEALED LEAD-ACID BATTERY

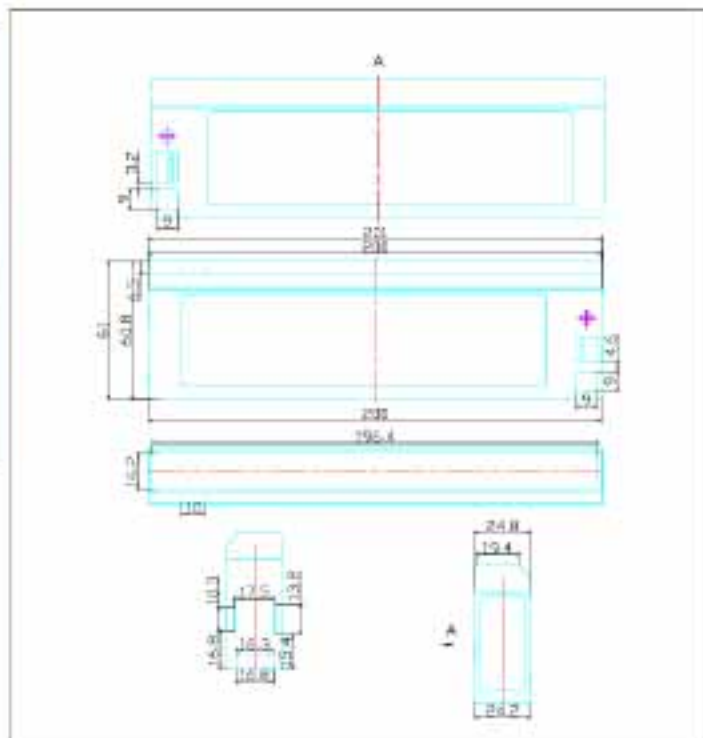

Specifications


| | | |
|-------------------------------|--------------|--------------------------|
| Nominal voltage | | 12V |
| Rated Capacity (20 hour rate) | | 2.3Ah |
| Dimensions | Total height | 2.41inches(61.0mm) |
| | Height | 2.41inches(61.0mm) |
| | Length | 7.89inches(201mm) |
| | Width | 0.98inches(25.0mm) |
| Weight | | Approx. 1.63Lbs(740g) |

■ Characteristics

| | | |
|---|------------------------------------|--|
| Capacity | 20 hour rate | 2.3Ah |
| | 10 hour rate | 2.0Ah |
| | 5 hour rate | 1.7Ah |
| | 1 hour rate | 1.5Ah |
| 77°F(25°C) | | |
| Internal Resistance | Full charged Battery 77°F(25°C) | 85mΩ |
| Capacity affected by Temperature (20 hour rate) | 104°F(40°C) | 102% |
| | 77°F(25°C) | 100% |
| | 32°F(0°C) | 85% |
| | 5°F(-15°C) | 65% |
| Self-Discharge 77°F(25°C) | Capacity after 3 month storage | 90% |
| | Capacity after 6 month storage | 80% |
| | Capacity after 12 month storage | 60% |
| Charge (Constant Voltage) | Cycle | Initial Charging Current less then 0.4A Voltage 14.5~14.9V/12V 77°F(25°C) |
| | Float | Voltage 13.5~13.8V/12V 77°F(25°C) |

* The above data are average values, and can be obtained within

■ Discharge Current & Discharge Duration Time 77°F(25°C)

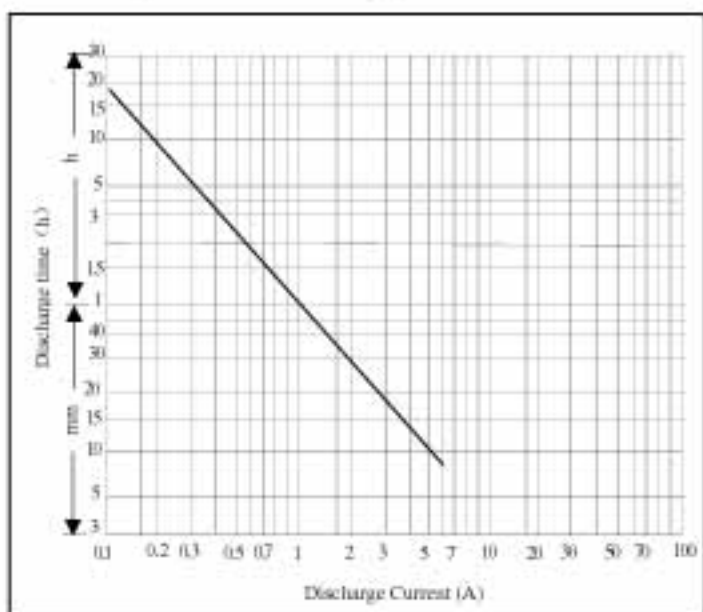

■ Discharge curves 77°F(25°C)

